

TOYODA

FA SERIES

Horizontal Spindle Machining Center

FA630S
FA800S
FA1050S



JTEKT
JTEKT CORPORATION

Most suitable to every Mono-zukuri

FA1050S/FA800S

Born of joyful wide specification for

□1,050/□800 class horizontal machining center



U. S. Patent on the machine : 7,140,775 and others



U. S. Patent on the machine : 7,140,775 and others

Offering the ultimate in user-friendliness



A design which considers both operability and safety from the perspective of the user.

A movable operation panel mounted on the machine's left-hand side which is easier to use.



Powerful cutting and accurate machining

The combination of a robust bed and column, a high rigidity square slide and a high-output spindle, along with the underlying quantitative analysis system, result in powerful and accurate cutting.

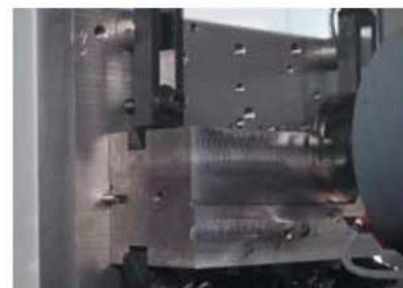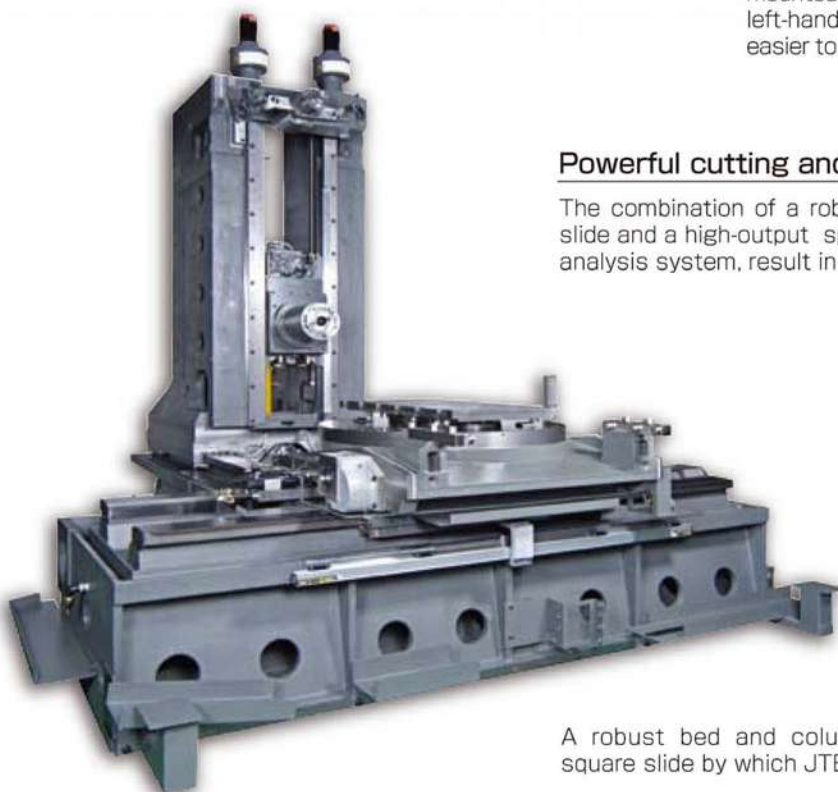

The perfect balance between a high-output spindle and the machine itself makes for powerful cutting.


A robust bed and column adopting the highly rigid square slide by which JTEKT swear.

Making the swing of workpiece more wider. Long tool is available as a standard.

Machining of one size larger workpiece or attaching of plural workpieces became possible by expanding the swing of workpiece.

FA800S		FA1050S	
Max. workpiece swing	$\phi 1,300 \rightarrow \phi 1,600$ (Restraint of width)	Max. workpiece swing	$\phi 1,600 \rightarrow \phi 1,850$ (Restraint of width)
Tool length	550 $\rightarrow$ 800mm	Tool length	550 $\rightarrow$ 800mm


※The interference of tool and workpiece might be generated. Please check with our sales for the details.

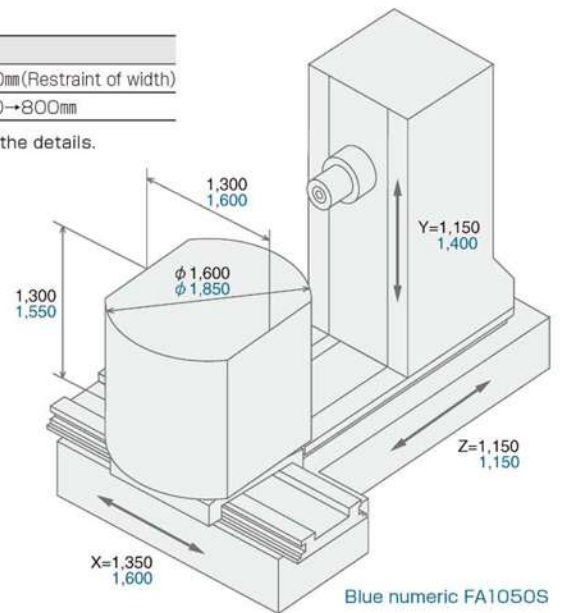

A wide selection of spindles. You can select the best spindle for your job, from lower to higher speed with a wider range of output.


6,000min⁻¹ standard spindle

For powerful cutting of iron and casting

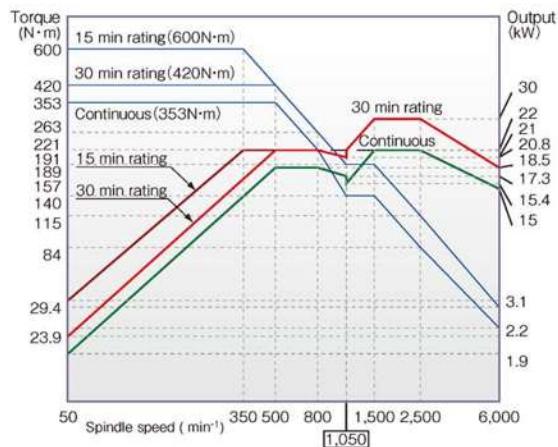


15,000min⁻¹ (22/18.5kW) spindle

For high speed processing of aluminum

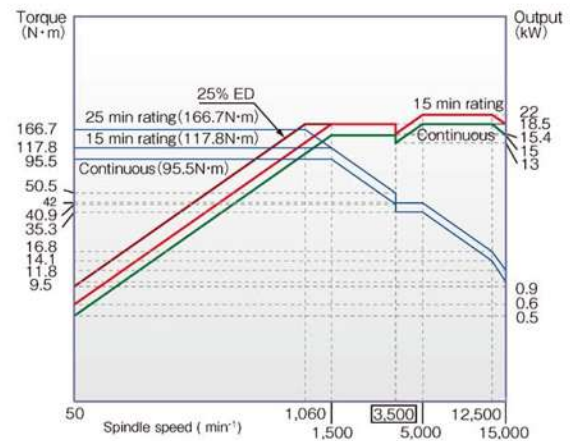


6,000min⁻¹ high output spindle (gear change)

For heavy cutting of iron and casting

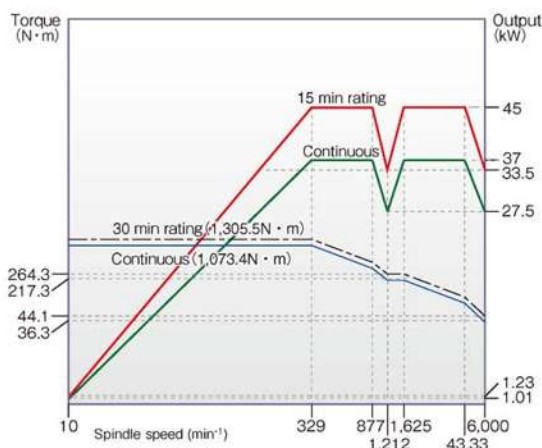

15,000min⁻¹ (30/25kW) spindle

For high speed cutting of iron and casting

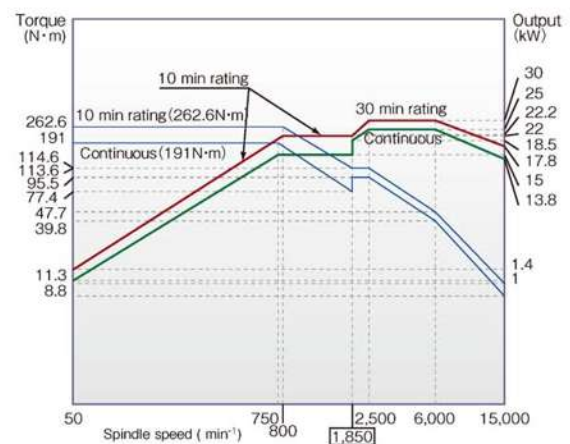

Most suitable to every Mono-zukuri

FA630S

High rigid machine of □630 class



U.S. Patent on the machine: 7,140,775 and others

Offering the ultimate in user-friendliness

A design which considers both operability and safety from the perspective of the user.



A movable operation panel mounted on the machine's left-hand side which is easier to use.

Powerful cutting and accurate machining

The combination of a robust bed and column, a high rigidity square slide and a high-output spindle, along with the underlying quantitative analysis system, result in powerful and accurate cutting.




The perfect balance between a high-output spindle and the machine itself makes for powerful cutting.



A robust bed and column adopting the highly rigid square slide by which JTEKT swear.

FA630S	
Max. workpiece swing × Max. workpiece height	φ1,000 × φ1,000
Tool dia. × Tool length	φ120 × φ500


※The interference of tool and workpiece might be generated. Please check with our sales for the details.

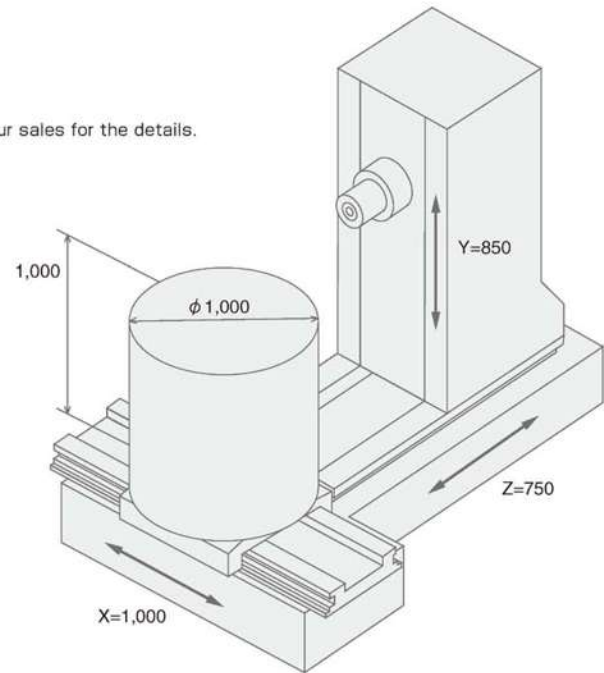

A wide selection of spindles. You can select the best spindle for your job, from lower to higher speed with a wider range of output.


6,000min⁻¹ standard spindle

For powerful cutting of iron and casting

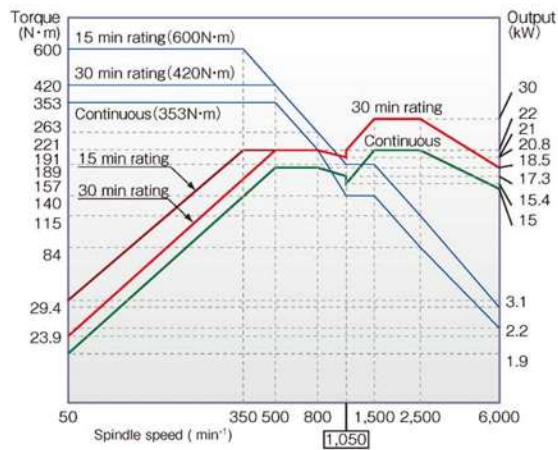


15,000min⁻¹ (22/18.5kW) spindle

For high speed processing of aluminum

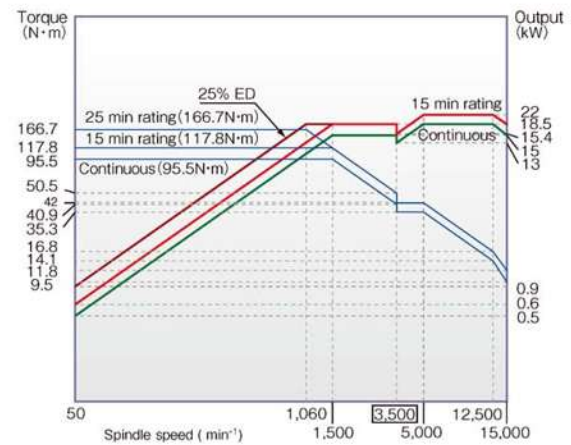


5,000min⁻¹ high output spindle(gear change)

For heavy cutting of iron and casting

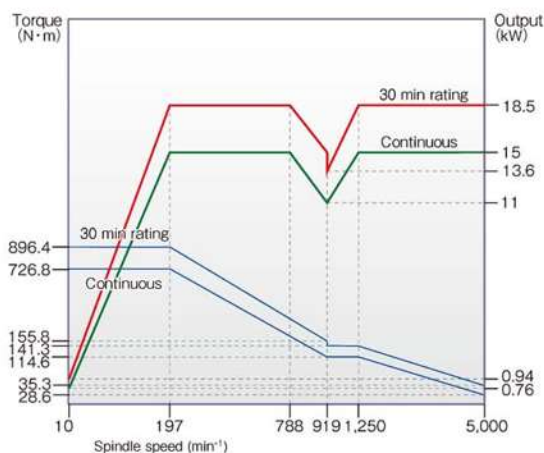

15,000min⁻¹ (30/25kW) spindle

For high speed cutting of iron and casting

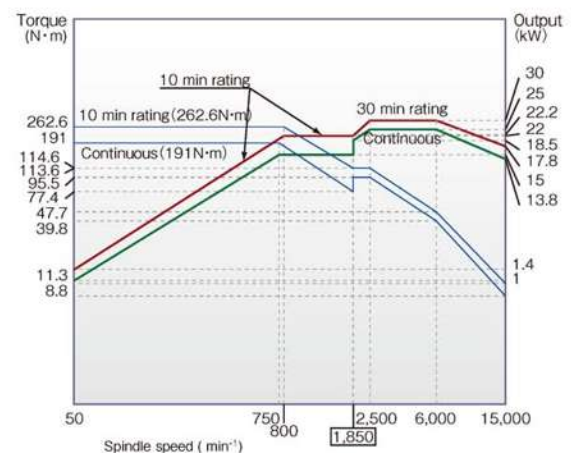

Machine Specifications

Item		Unit	FA630S				FA800S					
			Standard specifications		Special specifications		Standard specifications		Special specifications			
Table & Pallet	Table dimensions(pallet dimensions)	mm	□630				□800 (Pallet)					
	Rotary table indexing angle	°	Min.1°		0.001°(NC)		Min.1°		0.001°(NC)			
	Pallet height(from floor)	mm	1,200				1,300					
	Max load on pallet	kg	1,300				2,500					
	Table indexing time(90°indexing)	sec	2.7		3.2(NC)		5					
	Pallet change time	sec	12		13.5(NC)		40		45(NC)			
Stroke	X-axis	mm	1,000				1,350					
	Y-axis	mm	850				1,150					
	Z-axis	mm	750				1,150					
	Distance between spindle nose and table center	mm	175-925				200-1,350					
	Distance between spindle center and top of pallet	mm	50-900				50-1,200					
	Max. workpiece swing × Max. workpiece height	mm	φ1,000×1,000				φ1,600×1,300 ※1					
Feeds	Rapid feed rate (X,Y and Z)	m/min	36				24					
	Cutting feed rate (X,Y and Z)	m/min	0.001~36				0.001~24					
	Ball screw diameter (X,Y and Z)	mm	φ50				φ63, φ50×2tool ,φ63					
Spindle	Spindle speed	min ⁻¹	50~6,000		10~5,000(Gear)	50~15,000	50~15,000	50~6,000	10~6,000(Gear)	50~15,000	50~15,000	
	Spindle diameter (front bearing bore)	mm	φ110		φ110	φ90	φ100	φ110	φ110	φ90	φ100	
	Allowable spindle thrust load	N	14,700		14,700	7,800	9,800	14,700	19,600	7,800	9,800	
	Spindle nose shape		BT No.50		HSK, KM		BT No.50					
	Spindle motor, short-time/continuous	kW	30/22		18.5/15	22/18.5	30/25	30/22	45/37	22/18.5	30/25	
ATC	Tool holding capacity	tool	60		40, 120, 190		60		40, 120			
	Tool(dia. x length)	mm	φ120 × 500 ※2				φ120 × 800 ※2					
	Tool mass	kg	27				35					
	Max. tool moment	N·m	29.0				29.0					
	Tool change time(Tool-to-Tool)	sec	2.0(15kg)				2.0 (15kg)		3.1(15kg)	2.0(15kg)		
	Tool change time(Chip-to-Chip)	sec	5.5(15kg)				7.9 (15kg)		9.0(15kg)	7.9(15kg)		
	Tools Holder		JIS6339 50T				JIS6339 50T					
	Pull stud		JIS6339 50P				MAS P50T-1					
Dimensions & Weight	Floor space (width X depth)	mm	3,550×6,050 ※3 (Without coolant tank)		4,440×6,050 ※3 (With 2-partitioned coolant tank)		4,225×7,400 ※3 (Without coolant tank)		5,115×7,400 ※3 (With 2-partitioned coolant tank)			
	Machine height	mm	3,561		3,758(5K with gear type spindle)		3,750		3,886(When housing 120 tools in magazine)			
	Machine weight	kg	16,000				21,000					
Various Capacities	Working oil	L	100				63					
	Slide lubricant	L	5.5				5.5					
	Spindle oil air	L	2.9		—	2.9		2.9		—	2.9	
	Table	L	4		3.5(NC)		4		4(NC)			
	Spindle coolant	L	35		63	35		35		63	35	
	Power supply capacity	kVA	52		44	52		52		67	52	
	Control voltage	V	AC100 DC24				AC100 DC24					
	Air source capacity	NL/min	900				900					
	Air source pressure	MPa	0.4~0.5				0.4~0.5					
Capability & Performance	Positioning accuracy ※4	mm	±0.003/FS		±0.002/FS(With scale)		±0.003/FS		±0.002/FS(With scale)			
	Repeatability positioning accuracy※4	mm	±0.0015		±0.001/FS(With scale)		±0.0015		±0.001/FS(With scale)			
	Table indexing accuracy ※4	sec	±2		±7(NC), ±3.5(With NC encoder)		±2		±7(NC), ±3.5(With NC encoder)			
	Table indexing repeatability ※4	sec	—		±3.5(NC), ±2(With NC encoder)		—		±3.5(NC), ±2(With NC encoder)			

※1 Run-out of workpiece is limited to 1,300mm(FA800S) or 1,600mm(FA1050S) in the X axis direction. For details, refer to the tooling data.

※2 For details, refer to the tooling data.

※3 For details, refer to the layout plan.

※4 According to our inspection method.

CNC unit specifications FANUC31i

FA1050S			
Standard specifications	Special specifications		
☐ 1050 (Pallet)			
Min. 1°	0.001°(NC)		
1,400			
3,000			
5			
43	48(NC)		
1,600			
1,400			
1,150			
250-1,400			
50-1,450			
φ1,850×1,550 ※1			
24			
0.001~24			
φ63, φ50×2tool, φ63			
50~6,000	10~6,000(Gear)	50~15,000	50~15,000
110	φ110	φ90	φ100
14,700	19,600	7,800	9,800
BT No.50			
30/22	45/37	22/18.5	30/25
60	40,120		
φ120 x 800 ※2			
35			
29.0			
2.0 (15kg)	3.1(15kg)	2.0(15kg)	
7.9 (15kg)	9.0(15kg)	7.9(15kg)	
JIS6339 50T			
MAS P50T-1			
4,665×8,140 ※3 (Without coolant tank)	5,460×8,140 ※3 (With 2-partitioned coolant tank)		
4,100	4,236(When housing 120 tools in magazine)		
30,000			
63			
5.5			
2.9	—	2.9	
4	6.5(NC)		
35	63	35	
54	69	54	
AC100 DC24			
900			
0.4~0.5			
±0.003/FS	±0.002/FS(With scale)		
±0.0015	±0.001/FS(With scale)		
±2	±7(NC), ±3.5(With NC encoder)		
—	±3.5(NC), ±2(With NC encoder)		

Division	Name	●Standard/□Optional
Axis control	Min. input increment (0.001mm)	●
	Machine lock	●
	Absolute position detection	●
	Inch/metric switch	□
Operation	Dry run	●
	single block	●
	Manual handle feed 1 set	●
	Program restart	□
Interpolation function	Manual handle interrupt	□
	Nano interpolation	●
	Positioning (G00)	●
	Exact stop mode (G61)	●
	Tapping mode (G63)	●
	Cutting mode (G64)	●
	Exact stop (G09)	●
	Linear interpolation (G01)	●
	Arc interpolation (G02,G03)	●
	Dwell (G04)	●
	Helical interpolation	●
	Reference point return (G28,G29)	●
	Second reference point return (G30)	●
	Third and fourth reference point return(G30)	●
Feed function	AI contouring control I (pre-read 30 blocks)	●
	F1-digit feed	□
Program entry	Local coordinate system (G52)	●
	Machine coordinate system (G53)	●
	Workpiece coordinate system (G54 to G59)	●
	Additional workpiece coordinate system (48 sets)	□
	Additional workpiece coordinate system (300 sets)	□
	Custom macro	●
	Additional custom macro common variables (#100 to #199,#500 to #999)	●
	Fixed drilling cycle (G73,G74,G76,G80 to G89,G98 and G99)	●
	Additional optional block skip (9 piece)	□
	Automatic corner override	□
Spindle function	Rigid Tap	●
Tool function Tool correction function	No. of tool offset (99 pieces)	●
	No. of tool offset (200 pieces)	□
	No. of tool offset (400 pieces)	□
	No. of tool offset (499 pieces)	□
	No. of tool offset (999 pieces)	□
	No. of tool offset (2000 pieces)	□
	Tool offset	●
	Tool dia.·Tool nose radius compensation	●
	Tool length compensation (G43,G44,G49)	●
Editing operation	Program memory storage (128 K-byte)	●
	Program memory storage (256 K-byte)	□
	Program memory storage (512 K-byte)	□
	Program memory storage (1 M-byte)	□
	Program memory storage (2 M-byte)	□
	Program memory storage (4 M-byte)	□
	Program memory storage (8 M-byte)	□
	No. of registerable programs (250 pieces)	●
	No. of registerable programs (500 pieces) * required memory storage 256 K-byte	□
	No. of registerable programs (1000 pieces) * required memory storage min. 512 K-byte	□
	No. of registerable programs (2000 pieces) * required memory storage min. 1 M-byte	□
	No. of registerable programs (4000 pieces) * required memory storage min. 2 M-byte	□
	Plural programs simultaneous edit (including back ground edit)	●
Data entry/display	Touch panel control	●
Communication function	Built-in ethernet	●
Others	10.4 inch color LCD	●

FANUC is the registered trademark of FANUC Ltd.

Accessories Check Sheet


○ : Standard accessories – : Not available

Item	Equipment name	FA630S	FA800S	FA1050S
Table and Pallet	Index table	1" indexing table		
		NC indexing table		
	Pallet	NC indexing table (with encoder)		
		Standard pallet screw hole		
Spindle relations	Speed	T-groove pallet		
		Single piece screw hole		
		Single piece T-groove		
		6,000min ⁻¹ BT50 (30/22kW) spindle(with spindle-through coolant spec)		
		15,000min ⁻¹ BT50 (22/18.5kW) spindle(with spindle-through coolant spec)		
		15,000min ⁻¹ BT50 (30/25kW) spindle(with spindle-through coolant spec)		
	Collet	6,000min ⁻¹ BT50 (45/37kW) spindle(with spindle-through coolant spec)		
		5,000min ⁻¹ BT50 (18.5/15kW) spindle(with spindle-through coolant spec)		
		Filler block for oil hole holder		
		Positioning block for angle head holder		
		HSK specification		
		BIG PLUS specification		
Tool magazine	Tool capacity	MAS I		
		JIS		
		MAS II		
		60 tools		
Coolant relations	Coolant supply unit	40 tools		
		120 tools		
		190 or more tools		
		Coolant supply unit(water soluble/with take-up chip conveyor/scraper type/spindle-through coolant spec/1MPa through pump)		
		Coolant supply unit(water soluble/with take-up chip conveyor/scraper type/spindle-through coolant spec/3MPa through pump)		
		Coolant supply unit(water soluble/with take-up chip conveyor/scraper type/spindle-through coolant spec/7MPa through pump)		
		Coolant supply unit(water soluble/with take-up chip conveyor/2-tank type/spindle-through coolant spec/1MPa through pump)		
		Coolant supply unit(water soluble/with take-up chip conveyor/2-tank type/spindle-through coolant spec/3MPa through pump)		
		Coolant supply unit(water soluble/with take-up chip conveyor/2-tank type/spindle-through coolant spec/7MPa through pump)		
		Coolant temperature control function (With sub tank)		
	Coolant cooling	External nozzle coolant		
		Ceiling shower coolant		
		Chip flushing coolant		
		Internal screw conveyor		
		Coolant cooling		
		Magnet separator		
		Oil skimmer		
		Chip box		
Splash guard	Enclosure guard	Belt type		
		Chip box		
		Splash gun (at APC)		
		Mist collector		
Operation control function, others	Leakage breaker	Air blower		
		Enclosure guard		
		Door interlock at operating position		
		APC door interlock		
Labor saving function	Internal lighting	Electromagnetic lock type		
		Automatic fire extinguisher		
		Pallet changer (APC)		
		Spindle cooling unit		
Support for high accuracy	Scale feedback(X, Y- and Z-axes)	Touch sensor function		
		Optical type (without energization); with alignment and datum face correction functions		
		Optical type (with energization); with alignment, datum face correction, gap elimination and tool breakage detection function		
		Automatic tool length measurement function and datum face for measurement(interference area caused)		
		Automatic measuring function		
		Automatic measuring correction function		
		Rotary coordinate system correction function		
		Rotary coordinate axis correction function		
		STS(Spindle Thermo Stabilizer) function		
		Package		
Operator support function	Tool management	OP10i basic model		
		OP20i basic model		
		OP20iP maintenance model		
		OP20iT tool control model		
		OP20iA advanced tool control model		
		AC function (condition control)		
	Pallet management	Cutting condition setting function		
		Replacement tool automatic indexing function		
		Tool data update during installation and removal		
		Storage tool data saving function		
		Tool ID function		
		Tool list display		
	Auxiliary function	APC control		
		Multi-workpiece installation		
		Measurement result display		
		Signal condition display		
		Fault history		
		Fault code-specific frequency		
Maintenance function	Load monitor	Periodic inspection display		
		Load monitor		


We supply the best system to the customer with a wide selection of modules.

Unmanned operation, more flexibility in the system and an improved level of control.

A state-of-the-art production system that only JTEKT, with our grasp on key points of the FA, are able to provide.


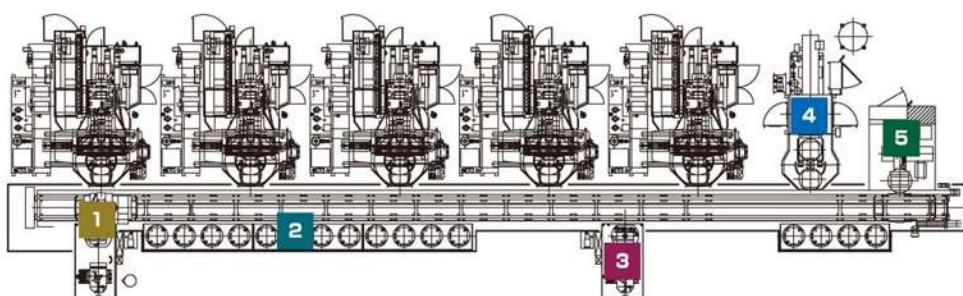


- 1 Pallet transfer unit
- 2 Buffer station
- 3 Setup change station
- 4 Wash booth
- 5 Measuring device

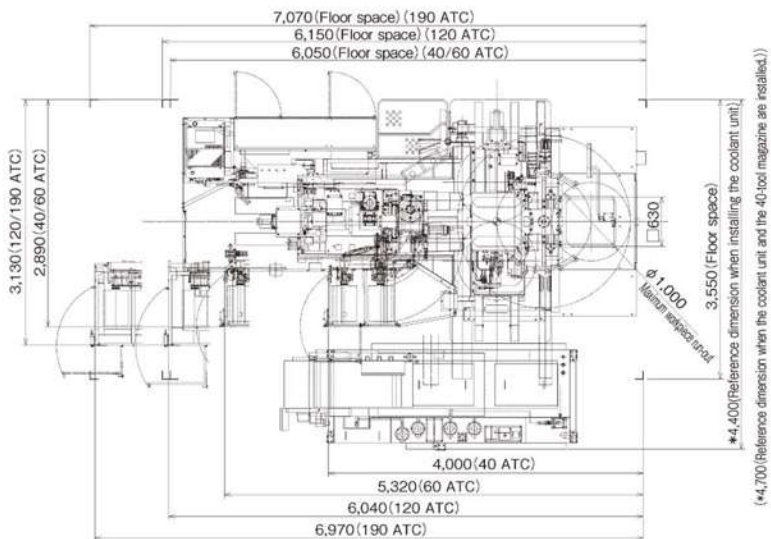


FA630S

Layout plan

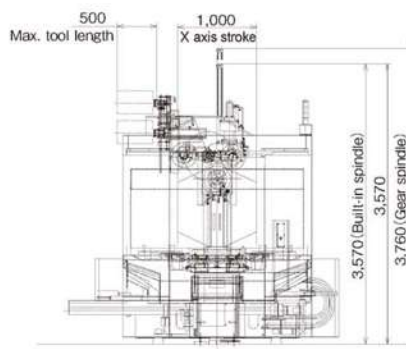
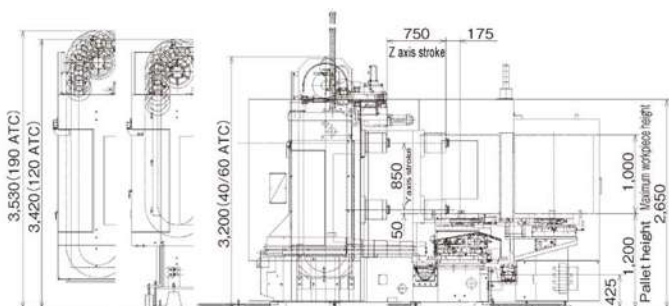


* shows dimensions of coolant unit with take-up chip conveyor. The dimension change depending on the specification.

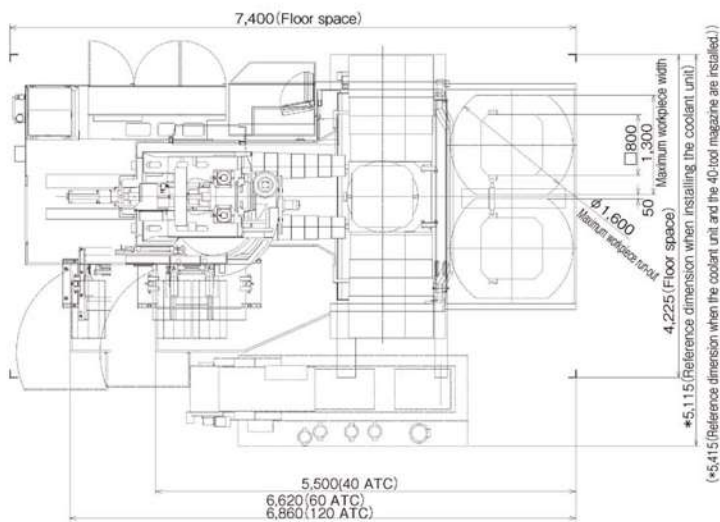


FA800S

Layout plan

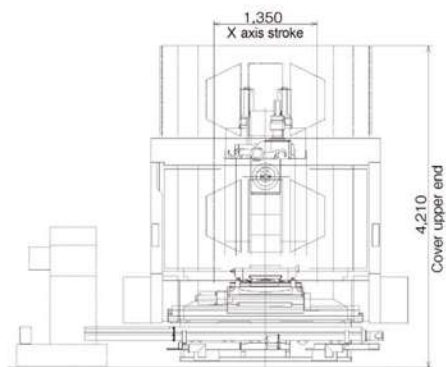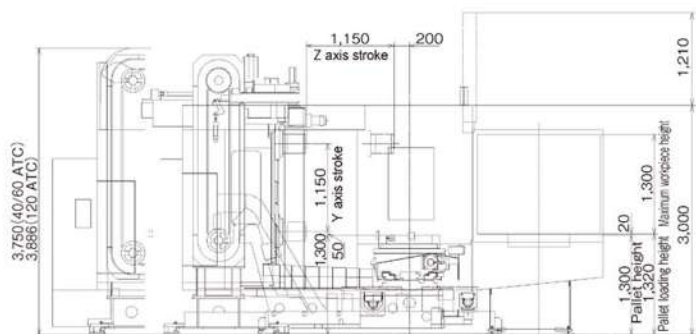

* shows dimensions of coolant unit with take-up chip conveyor. The dimension change depending on the specification.

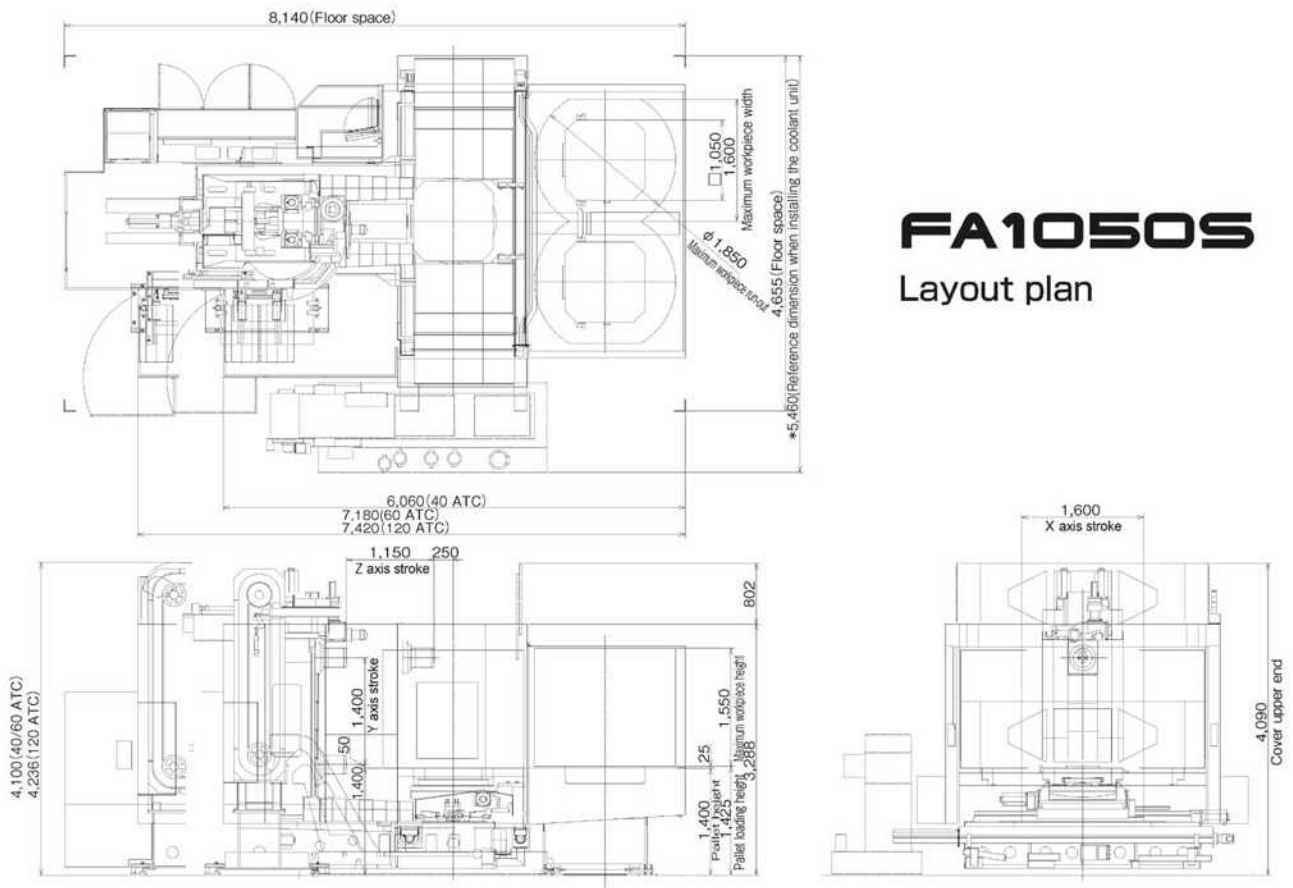

FA1050S

Layout plan

★ shows dimensions of coolant unit with take-up chip conveyor. The dimension change depending on the specification.

Note) The 40-tool magazine machine with the opening for the take-up chip conveyor on the back side may require the dimension * to be extended in order to avoid the interference between the magazine door and the conveyor. For details please contact JTEKT.



JTEKT JTEKT CORPORATION

NAGOYA HEAD OFFICE

No.7-1, Meieki 4-chome, Nakamura-ku, Nagoya, Aichi Pref., 450-8515, JAPAN Telephone : (81) 52-527-1900 Telefacsimile : (81) 52-527-1911

OSAKA HEAD OFFICE

No.5-8, Minamimemba 3-chome, Chuo-ku, Osaka, 542-8502, JAPAN Telephone : (81) 6-6271-8451 Telefacsimile : (81) 6-6245-3712

SALES & MARKETING HEADQUARTERS

No.5-8, Minamimemba 3-chome, Chuo-ku, Osaka, 542-8502, JAPAN Telephone : (81) 6-6245-6087 Telefacsimile : (81) 6-6244-9007

— GLOBAL NETWORK —

MACHINE TOOLS & MECHATRONICS BUSINESS OPERATIONS

MACHINE TOOLS & MECHATRONICS OVERSEAS SALES DEPT.

1, Asanimachi 1-chome, Kariya, Aichi Pref., 448-8652, JAPAN
Telephone : (81) 566-25-5171 Telefacsimile : (81) 566-25-5467

OVERSEAS AFFILIATED COMPANIES

TOYODA MACHINERY USA CORP. HEADQUARTERS

316 W.University Drive,
Arlington Heights, IL 60004
U.S.A
Telephone : (1) 847-253-0340
Telefacsimile : (1) 847-577-4660

TOYODA MACHINERY USA CORP. AUTOMOTIVE PRODUCTS & SPECIAL MACHINES DIVISION

51300 W. Pontiac Trail
Wixom, MI, 48393 1003
U.S.A
Telephone : (1) 248-624-5755
Telefacsimile : (1) 248-624-8597

TOYODA MACHINERY AND ENGINEERING EUROPE SAS

2 Grande Allée P.A. des Petits Carreaux
94380 Bonneuil sur Marne, FRANCE
Telephone : (33) 1 49 55 85 80
Telefacsimile : (33) 1 43 77 47 50

TOYODA MITSUI EUROPE GmbH

HEADQUARTERS
Bischofsstr. 118 47809 Krefeld GERMANY
Telephone : (49) 21 51-5188-300
Telefacsimile : (49) 21 51-5188-333

TOYODA MACHINERY (DALIAN) CO., LTD. HEADQUARTERS

46 Developing Zone In Dalian, 116600 China
Dalian, CHINA
Telephone : (86) 411-8733-4001
Telefacsimile : (86) 411-8733-4602

TOYODA MACHINERY (DALIAN) CO., LTD. BEIJING OFFICE

Room 1017, Fortune Building No.5 Dong
San Huan North Road Chaoyang,
Beijing, 100004 CHINA
Telephone : (86) 10-6590-9356~58
Telefacsimile : (86) 10-6590-9359

TOYODA MACHINERY (DALIAN) CO., LTD. SHANGHAI OFFICE

Room 1907, Aetna Tower, 107 Zuyi Road,
Shanghai, 200051 CHINA
Telephone : (86) 21-6237-5128
Telefacsimile : (86) 21-6237-5129

TOYODA MACHINERY (DALIAN) CO., LTD. FOSHAN OFFICE

2 Wushaxinhui Road, Dalang Street Shunde
District, Foshan,
Guangdong, 52833 CHINA
Telephone : (86) 757-2232-6651~52
Telefacsimile : (86) 757-2232-6650

TOYODA MACHINERY (DALIAN) CO., LTD. CHONGQING OFFICE

701 Lanmei Dacao (Lanmei Avenue) H-Tech
Zone, Chongqing, 400039 CHINA
Telephone : (86) 23-6171-1133
Telefacsimile : (86) 23-6171-1133

TPA ENGINEERING CORP

9781-171 Lot,
Namdong 2nd Industrial Complex,
684-16, Gojan-Dong, Namdong-ku,
Incheon, KOREA
Telephone : (82) 032-822-0305
Telefacsimile : (82) 032-822-0306

TOYODA Machinery S.E. Asia Co., Ltd.

313, Bangna-Trad Road, KM.1
Kwang Bangna, Khet Bangna,
Bangkok, 10260 THAILAND
Telephone : (66-2) 361-8250~1
Telefacsimile : (66-2) 361-8252

TOYODA KOKI DO BRASIL INDUSTRIA E COMERCIO DE MAQUINAS, LTDA.

Rua Rego Barros 1319,
Vila Antonieta, Sao Paulo-SP, BRASIL
Telephone : (55) 11-6724-5711
Telefacsimile : (55) 11-6727-3450

TOYODA MICROMATIC MACHINERY INDIA LIMITED

Plot No.550-E, 2nd Floor
Place City-II, Sector-37, Gurgaon 122 001 INDIA
Telephone : (91) 124-4264601/02/03
Telefacsimile : (91) 124-4288355

<http://www.jtekt.co.jp>

Information presented in this brochure is subject to change without prior notice.

Available machines or machines shown may vary depending on optional equipment or periodic design changes.

The export of commodities or technical data, which are controlled by the Foreign Exchange and Foreign Trade Law,

must be made under an export license issued by Japanese Government.

In case of re-transfer, re-sale, or re-export, a prior written consent of JTEKT is necessary.

Please contact your JTEKT representative for details. Always read manuals carefully before using any machinery to ensure safe and proper use.